

SOLIS DONGLE RESET INSTRUCTION GUIDE



Ginlong Technologies Co., Ltd.

NOTE: If you are unable to see the AP_XXXXXXXXX in the Wi-Fi settings, we need to reset the dongle by exposing the inside circuitry and pressing the button for 45 seconds at the end of the antenna wire.

STEPS FOR RESETTING THE DONGLE

STEP 1: Disconnecting the dongle from the inverter.

Unplugging the Wi-Fi Dongle

- The dongle is a delicate device. Be **GENTLE**.
- Do **NOT** twist the silver body of the dongle.
- Gently unscrew the black cap at the top, clockwise.




STEP 2: Push the clips using a pen or screwdriver. Make sure **NOT** to pull apart the upper and lower case of the dongle, they are attached. Just separate it carefully




STEP 3: Now connect the upper part of the dongle back to the inverter as shown. (Important Step)



STEP 4: The circuitry has a small SMD button at the bottom of the antenna as shown.

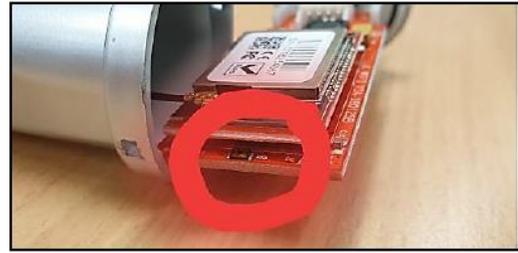

STEP 5: Press the SMD button for 45 x seconds. The light will switch OFF and back ON.

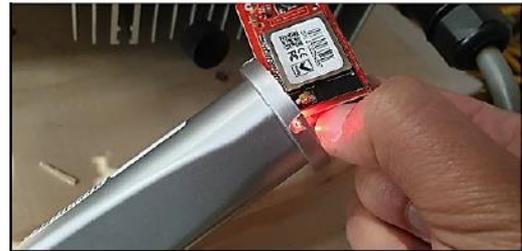

STEP 6: Check your Wi-Fi connection list. If AP_XXXXXXXX is not visible, repeat the process 1-2 times until it is visible.

STEP 7: If the light is on and you can see the AP_XXXXXXXX in your network list the reset has been successful. You can connect the case back to the upper part of the dongle.

'ALL DONE'

HAVE A GOOD DAY !